


RoHS
COMPLIANT

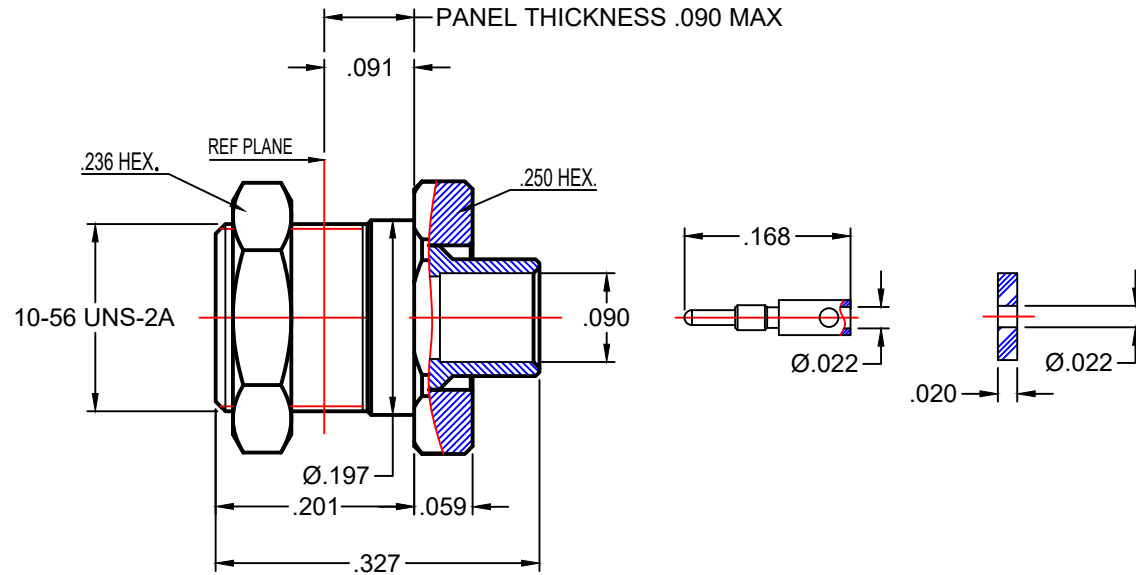

NOTES:

INTERFACE CONFORMS TO MIL-PRF-39012 & MIL-STD-348, SMP SERIES.

ELECTRICALS:


FREQUENCY RANGE: DC TO 40 GHz.
VSWR: 1.50:1 MAX.

MATERIALS:

BODY: STAINLESS STEEL, TYPE 303, PER ASTM-A-582
SOLDER BODY & NUT: BRASS, 360 ALLOY ½ HARD, PER ASTM-B-16
CONTACT: BERYLLIUM COPPER PER ASTM-B196
DIELECTRICS: TEFLON PER ASTM-D-1710
GASKET: SILICONE RUBBER PER A-A-59588.

FINISHES:


SOLDER BODY & CENTER CONTACT: GOLD PLATE PER MIL-DTL-45204
BODY: PASSIVATE PER QQ-P-35 TYPE VI
NUT: NICKLE PLATE PER QQ-N-290, CLASS 1, GRADE G

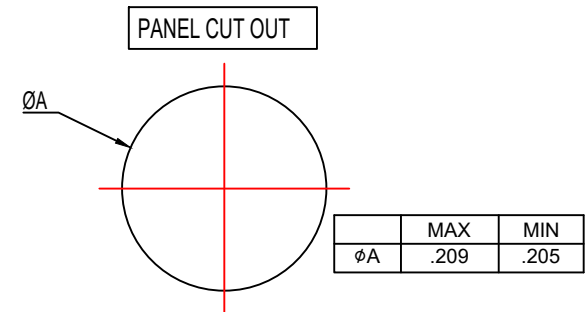

PROPRIETARY NOTICE
THIS DRAWING AND DESIGNS AND IDEAS EMBEDDED IN THE DEVICE TO WHICH IT RELATES AND THE METHODS OF CONSTRUCTION THEREOF SHALL NOT BE REPRODUCED, COPIED, EITHER WHOLLY OR IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF AN EZ FORM COMPANY OFFICIAL

APPD.	T.D.	
DATE	04/30/21	
BY	T.D.	
DATE	04/30/21	
DESCRIPTION	INITIAL RELEASE	
REV.	-	

UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN INCHES:		SCALE	
TOLERANCES:		5:1	
NONE			
MATERIAL: SEE NOTES			
FINISH: SEE NOTES			
DRAWN	DATE	CHECKED	DATE
T.D.	04/26/21	AT	04/26/21
APPROVED	DATE	SHEET 1 OF 1	
F.V.	04/26/21		



EZ Form Cable Corporation	
285 Welton Street Hamden, CT 06517	
TITLE SMP MALE, BULKHEAD, STRAIGHT FULL DETENT FOR .086 SEMI-RIGID CABLE	
CODE IDENT.	REV.
A 9W826 701405-186	-