

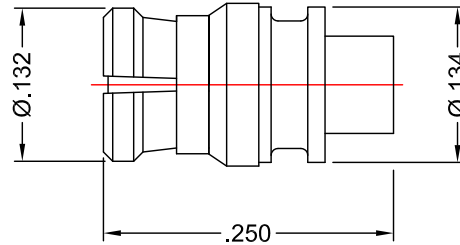


RoHS
COMPLIANT



NOTES:

INTERFACE CONFORMS TO MIL-STD-348 SMP SERIES

ELECTRICAL:

NOMINAL IMPEDANCE: 50Ω
FREQUENCY RANGE DC TO 40 GHz

MATERIALS:

INSULATOR: TEFLON PER ASTM-D-1710
BODY, CONTACT, & ANTI-ROCK RING: BERYLLIUM COPPER PER ASTM-B-196
DIELECTRIC STOP: TORLON (POLYAMIDE-IMIDE) PER ASTM-D-5204


FINISHES:

BODY, CONTACT, & ANTI-ROCK RING: GOLD PLATE PER MIL-DTL-45204 50 MICRO INCHES MIN.
OVER 50 MICRO INCHES NICKEL MIN. PER AMS-QQ-N-290

PROPRIETARY NOTICE
THIS DRAWING AND DESIGNS AND IDEAS EMBEDDED IN THE DEVICE TO WHICH IT RELATES AND THE METHOD OF PRODUCING THE DEVICE SHALL NOT BE EMPLOYED COPIED OR DISCLOSED TO ANYONE IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF AN EZ FORM COMPANY OFFICIAL

APPD. DATE	3/29/17	
BY DATE	3/29/17	
DESCRIPTION	INITIAL RELEASE	
REV.	-	

UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN INCHES:		SCALE	
TOLERANCES: NONE		6:1	
MATERIAL: SEE NOTES			
FINISH: SEE NOTES			
DRAWN	DATE	CHECKED	DATE
J.N.	3/29/17	T.D.	3/29/17
APPROVED	DATE	SHEET 1 OF 1	
A.T.	3/29/17		



EZ Form Cable Corporation
285 Welton Street
Hamden, CT 06517

TITLE			
SMP STRAIGHT JACK .047 SEMI-RIGID CABLE			
A	CODE IDENT.	701406-047M	REV.
	9W826		-