


RoHS
COMPLIANT

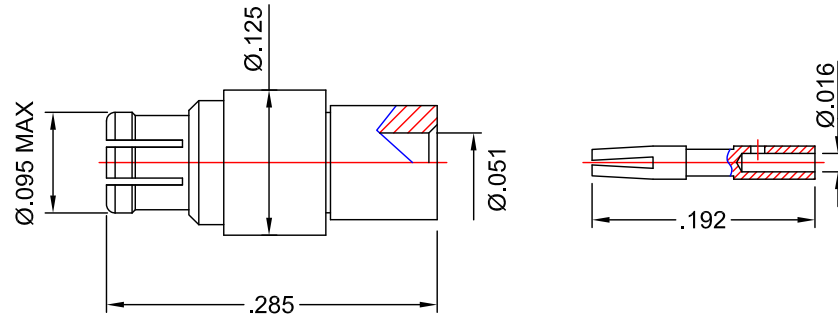

NOTES:

INTERFACE CONFORMS TO MIL-STD-348 SMPM SERIES

ELECTRICAL:


NOMINAL IMPEDANCE: 50Ω
FREQUENCY RANGE DC TO 65 GHz

MATERIALS:

INSULATOR: TEFLON PER ASTM-D-1710
CONTACT: BERYLLIUM COPPER PER ASTM-B-196
BODY: 360 ALLOY BRASS 1/2 HARD PER ASTM-B-16

FINISHES:


BODY & CONTACT: GOLD PLATE PER MIL-DTL-45204 50 MICRO INCHES MIN.
OVER 50 MICRO INCHES NICKEL MIN. PER AMS-QQ-N-290

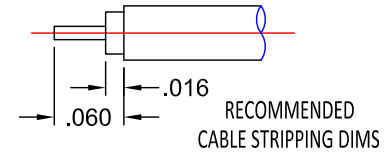

PROPRIETARY NOTICE
THIS DRAWING AND DESIGNS AND IDEAS EMBEDDED IN THE DEVICE TO WHICH IT RELATES AND THE METHOD OF PRODUCING THE DEVICE SHALL NOT BE EMPLOYED COPIED OR DISCLOSED TO ANYONE IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF AN EZ FORM COMPANY OFFICIAL

APPD. DATE	T.D. 4/21/17	
BY DATE	J.N. 4/21/17	
DESCRIPTION	INITIAL RELEASE	
REV.	-	

UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN INCHES: TOLERANCES: NONE		SCALE 6:1	
MATERIAL: SEE NOTES			
FINISH: SEE NOTES			
DRAWN J.N.	DATE 4/21/17	CHECKED T.D.	DATE 4/21/17
APPROVED A.T.	DATE 4/21/17	SHEET 1 OF 1	



EZ Form Cable Corporation 285 Welton Street Hamden, CT 06517			
TITLE SMPM STRAIGHT JACK .047 SEMI-RIGID CABLE			
A	CODE IDENT. 9W826	701407-047M	REV. -