NOTES:
INTEREFACE CONFORMS TO MIL–PFR–39012 SMA SERIES

MATERIALS:

BODY –	BRASS PER ASTM–B–16
CONTACT–	BERYLLIUM COPPER PER ASTM–B–196
INSULATOR–	TEFLON PER ASTM–D–1710

FINISHES:

CONTACT & BODY	GOLD PLATE PER MIL–G–45204

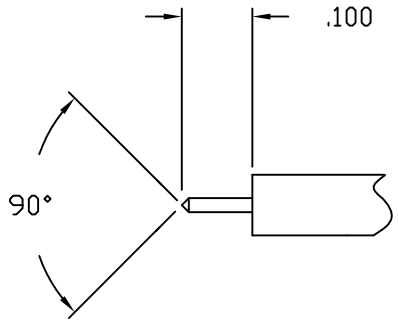

CABLE STRIPPING DIMENSIONS

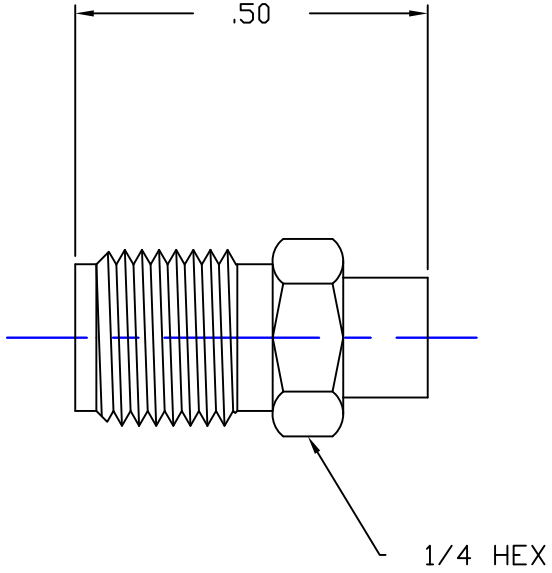

THIS DRAWINGTHE DESIGNS AND IDEAS EMBEDDED IN THE DEVICE TO WHICH IT RELATES AND THE METHOD OF PRODUCING THE DEVICE SHALL NOT BE EMPLOYED COPIED OR DISCLOSED TO ANYONE IN ANY MANNER WITHOUT THE CONCENT, OF AN EZ FORM COMPANY OFFICAL

	APPD		
	BY DATE		
DESCRIPTION			
REV.			

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES:
TOLERANCES:

DECIMALS:
2-PLACE ± .010
3-PLACE ± .015

FRACTIONS ± 1/64
ANGLES ± 3°

SCALE —

MATERIAL:

FINISH:

DRAWN	DATE	CHECKED	DATE
P.J.P.	7–16–07	J.A.B.	7–16–07
APPROVED	DATE	SHEET	OF
A. T.	7–16–07		

EZ FORM
CABLE CORPORATION
HAMDEN, CT. 06517

TITLE
SMA JACK
FOR .141 DIA. SEMI RIGID CABLE
DIRECT SOLDER, CAPTIVE CONTACT

CODE IDENT.		REV.
A	9W826	CD–705517–301	—