
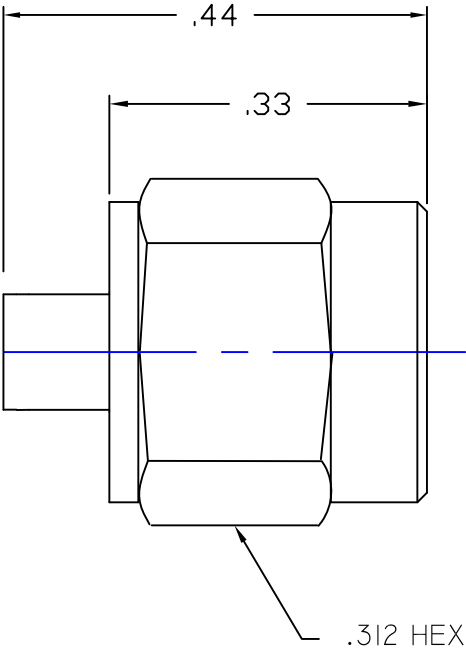


INTERFACE CONFORMS TO MIL-PRF-39012 SMA SERIES

- NOTES:
- MATERIALS:
- BODY, COUPLING NUT ——— BRASS PER ASTM-B-16
 - SNAP RING ——— BERYLLIUM COPPER PER ASTM-B-196
 - GASKET ——— SILICONE PER ZZ-R-765
 - INSULATOR ——— TEFLON VIRGIN WHITE PER ASTM-D-1710

- FINISHES:
- BODY, CONTACT ——— GOLD PLATE PER MIL-G-45204
 - COUPLING NUT

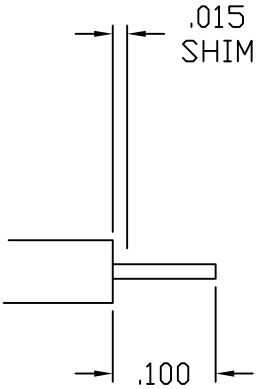

ORDER AS 705522-306SMA

THIS DRAWING THE DESIGN AND IDEAS EMBEDDED IN THE DEVICE TO WHICH IT RELATES AND THE METHOD OF PRODUCING THE DEVICE SHALL NOT BE EMPLOYED COPIED OR DISCLOSED TO ANYONE IN ANY MANNER WITHOUT THE CONSENT OF AN EZ FORM COMPANY OFFICIAL	APPD			UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES: TOLERANCES: DECIMALS: 2-PLACE ± .015 3-PLACE ± .005 FRACTIONS ± 1/64 ANGLES ± 3 MATERIAL: SEE NOTES FINISH: SEE NOTES DRAWN DATE P.J.P. 11-9-09 CHECKED DATE A.T. 11-9-09 APPROVED DATE J.A.B. 11-9-09 SHEET OF	SCALE ⊙ ◁	EZ FORM CABLE CORPORATION HAMDEN, CT 06517		
	BY					TITLE SMA MALE PLUG SOLDER ON CONTACT FOR USE WITH .086 SEMI RIGID CABLE NON MAGNETIC VERSION		
	DATE							
	DESCRIPTION							
	REV.					A	CODE IDENT. 9W826	CD-705522-306