

NOTES:
INTERFACE CONFORMS TO MIL-PRF-39012 SMA SERIES



MATERIALS:

BODY, COUPLING NUT—BRASS 1/2 HD PER ASTM-B-16
SNAP RING & CONTACT—BERYLLIUM COPPER PER ASTM-B-196
GASKET—SILICONE PER ZZ-R-765
INSULATOR—TEFLON PER ASTM-D-1710
CRIMP SLEEVE—COPPER

FINISHES:

CONTACT, BODY,—GOLD PLATE PER MIL-G-45204
COUPLING NUT,
CRIMP SLEEVE

RECOMMENDED
CABLE STRIPPING DIM'S

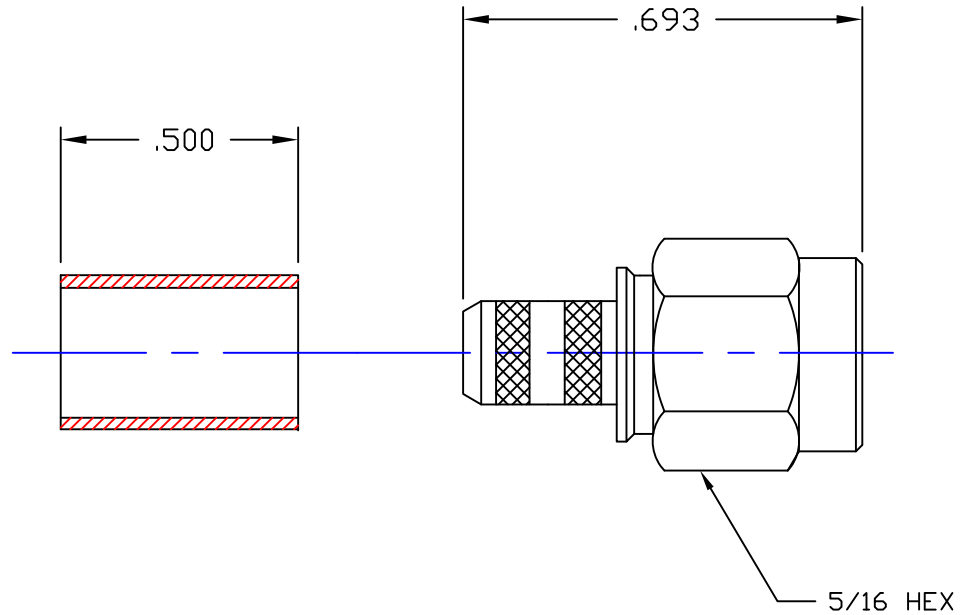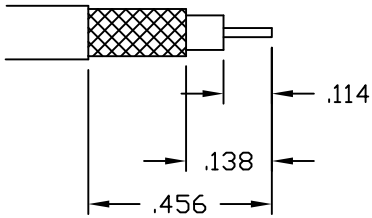

ORDER AS 705545-001SMA

THIS DRAWING THE DESIGNS AND IDEAS EMBEDDED IN THE DEVICE TO WHICH IT RELATES AND THE METHOD OF PRODUCING THE DEVICE SHALL NOT BE EMPLOYED COPIED OR DISCLOSED TO ANYONE IN ANY MANNER WITHOUT THE CONSENT OF AN EZ FORM COMPANY OFFICIAL

APPD	A.T. 2-24-08	A.T. 8-5-08
BY DATE	P.J.P. 2-24-08	P.J.P. 8-5-08
DESCRIPTION	REVISED DIMENSIONS	.500 WAS .375
REV.	A	B

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES:
TOLERANCES:
DECIMALS: 2-PLACE ± .01 FRACTIONS ± 1/64
3-PLACE ± .005 ANGLES ± 3

SCALE

MATERIAL: _____

FINISH: _____

DRAWN DATE CHECKED DATE
P.J.P. 3-18-03

APPROVED DATE SHEET | OF |
T.R. 3-18-03

EZ FORM
CABLE CORPORATION
HAMDEN, CT 06517

TITLE
SMA MALE PLUG FOR
RG 142, 55 FLEX
CABLE

A	CODE IDENT.	CD-705545-001	REV.
	9W826		B