RoHS
COMPLIANT

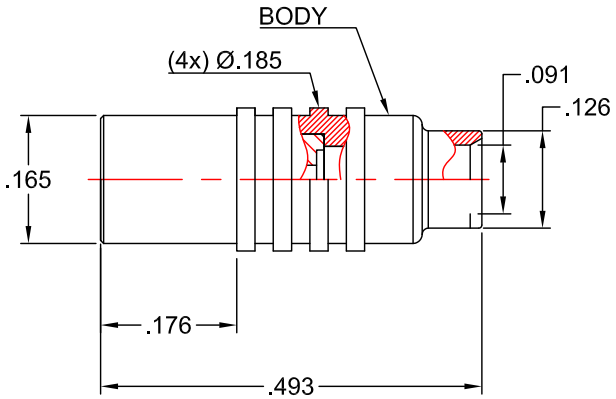

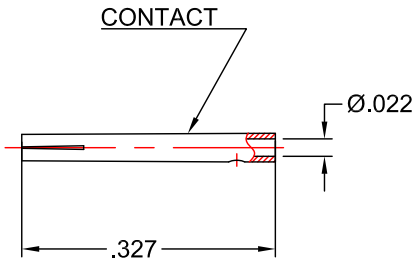

NOTES:

INTERFACE CONFORMS TO IEC 60169-36
AND CECC 22220 MCX SERIES

ELECTRICAL:

NOMINAL IMPEDANCE: 50Ω
FREQUENCY RANGE DC TO 6 GHz

MATERIALS:

INSULATOR: TEFLON PER ASTM-D-1710
CONTACT: BERYLLIUM COPPER PER ASTM-B-196
BODY: 360 ALLOY BRASS 1/2 HARD PER ASTM-B-16

FINISHES:

CONTACT: GOLD PLATE PER MIL-DTL-45204
BODY: GOLD PLATE PER MIL-DTL-45204

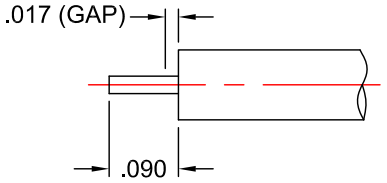

RECOMMENDED
STRIPPING DIMENSIONS

PROPRIETARY NOTICE
THIS DRAWING AND DESIGNES AND IDEAS EMBEDDED IN THE DEVICE TO WHICH IT RELATES AND THE METHOD OF PRODUCING THE DEVICE SHALL NOT BE EMPLOYED COPIED OR DISCLOSED TO ANYONE IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF AN EZ FORM COMPANY OFFICIAL

	DESCRIPTION		
APPD. DATE	INITIAL RELEASE	T.D. 6/16/17	
BY DATE		J.N. 6/16/17	
REV.		—	

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES:
TOLERANCES: NONE
SCALE 4:1

MATERIAL: SEE NOTES
FINISH: SEE NOTES

DRAWN	DATE	CHECKED	DATE
J.N.	6/16/17	T.D.	6/16/17
APPROVED	DATE	SHEET 1 OF 1	
A.T.	6/16/17		

EZ Form Cable
Corporation
285 Welton Street
Hamden, CT 06517
WWW.ezform.com

TITLE
MCX STRAIGHT JACK FOR
.086 SEMI RIGID CABLE

CODE IDENT.		REV.
A	9W826	701952-086MCX	-