



NOTES:
INTERFACE CONFORMS TO MIL-PRF-39012 SMA SERIES

MATERIALS:

BODY, COUPLING NUT—BRASS 1/2 HD PER ASTM-B-16
SNAP RING & CONTACT—BERYLLIUM COPPER PER ASTM-B-196
GASKET—SILICONE PER ZZ-R-765
INSULATOR—TEFLON PER ASTM-D-1710
CRIMP SLEEVE—COPPER

FINISHES:

CONTACT, BODY,—GOLD PLATE PER MIL-G-45204
COUPLING NUT,
CRIMP SLEEVE—NICKEL PLATE PER QQ-N-290

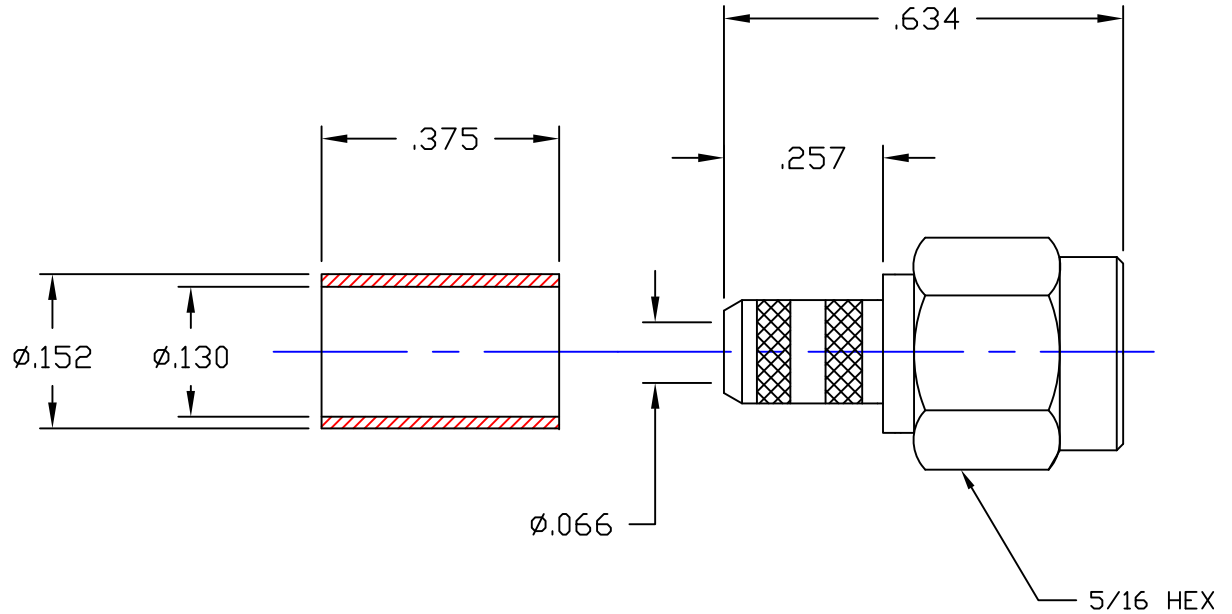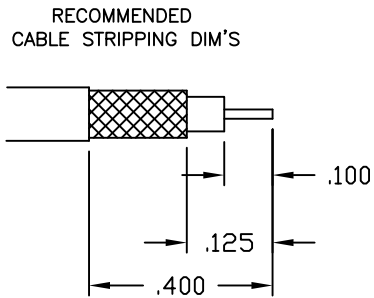

ORDER AS 705546-001SMA

THIS DRAWING THE DESIGN AND IDEAS EMBEDDED IN THE DEVICE TO WHICH IT RELATES AND THE METHOD OF PRODUCING THE DEVICE SHALL NOT BE EMPLOYED COPIED OR DISCLOSED TO ANYONE IN ANY MANNER WITHOUT THE CONSENT OF AN EZ FORM COMPANY OFFICIAL

APPD	A.T. 8-18-10	
BY DATE	P.J.P. 8-18-10	
DESCRIPTION	REVISED DIMENSIONS	
REV.	A	

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES:
TOLERANCES:
DECIMALS: 2-PLACE ± .010 FRACTIONS ± 1/64
3-PLACE ± .015 ANGLES ± 3'

MATERIAL:		SCALE	
FINISH:			
DRAWN P.J.P.	DATE 3-18-03	CHECKED	DATE
APPROVED T.R.	DATE 3-18-03	SHEET	OF

EZ FORM
CABLE CORPORATION
HAMDEN, CT 06517

TITLE SMA MALE PLUG FOR FLEX CABLE RG316			
A	CODE IDENT. 9W826	CD-705546-001	REV. A