
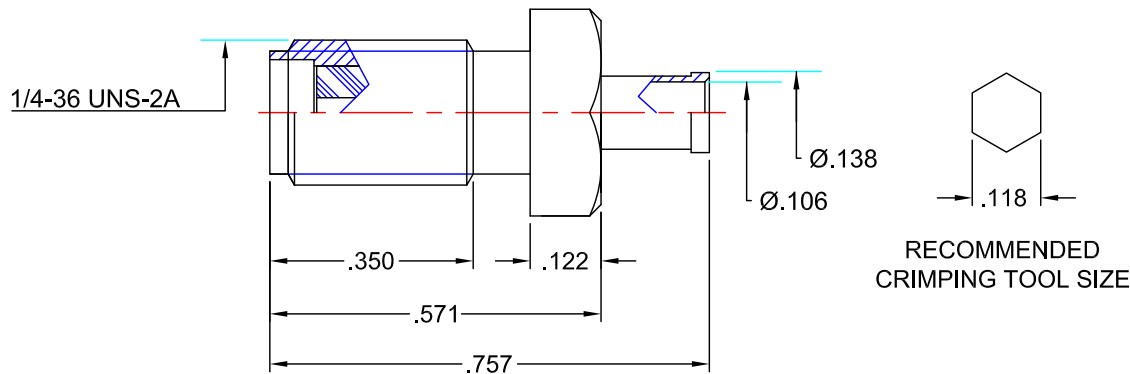


RoHS
COMPLIANT



NOTES:
INTERFACE CONFORMS TO MIL-PRF-39012
AND MIL-STD-348 SMA SERIES

ELECTRICAL:



NOMINAL IMPEDANCE: 50Ω
FREQUENCY RANGE: DC TO 12 GHz

MATERIALS:

INSULATORS: TEFLON PER ASTM-D-1710
CONTACT: BERYLLIUM COPPER PER ASTM-B-196
BODIES: 360 ALLOY BRASS 1/2 HARD PER ASTM-B-16

FINISHES:


CONTACT: GOLD PLATE PER MIL-DTL-45204
BODIES: GOLD PLATE PER MIL-DTL-45204

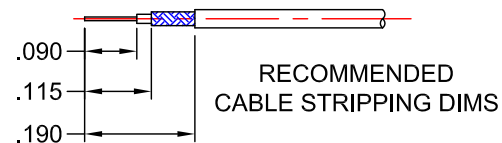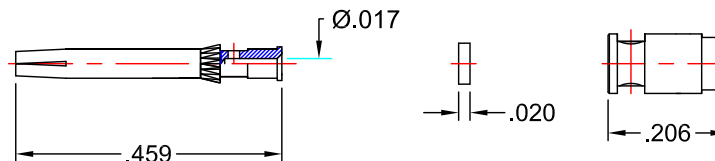

PROPRIETARY NOTICE
THIS DRAWING AND DESIGNS AND IDEAS EMBEDDED IN THE DEVICE TO WHICH IT RELATES AND THE METHOD OF PRODUCING THE DEVICE SHALL NOT BE EMPLOYED COPIED OR DISCLOSED TO ANYONE IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF AN EZ FORM COMPANY OFFICIAL

APPD. DATE	T.D. DATE	
4/18/17	4/18/17	
BY DATE	J.N. DATE	
4/18/17	4/18/17	
DESCRIPTION	INITIAL RELEASE	
REV.	-	

UNLESS OTHERWISE SPECIFIED:			
DIMENSIONS ARE IN INCHES:		SCALE	
TOLERANCES: NONE		3:1	
MATERIAL: SEE NOTES			
FINISH: SEE NOTES			
DRAWN	DATE	CHECKED	DATE
J.N.	4/18/17	T.D	4/18/17
APPROVED	DATE	SHEET 1 OF 1	
A.T.	4/18/17		



EZ Form Cable Corporation
285 Welton Street
Hamden, CT 06517
WWW.ezform.com

SMA JACK CRIMP FOR RG-178

A	CODE IDENT.	705564-001SMA	REV.
	9W826		-